

Facility Lights



WELDEX
CORPORATION

150W LED Facility Light

WDFL-17R150W




- Low power consumption
- Low CO₂ emissions
- Do not attract insects
- Long lifespan
- Low heat radiation
- No harmful material
- CREE power LEDs

Specification

Luminous flux	Efficacy	Wattage (Max)	Input voltage	Color temperature
14100lm	96.3lm/w	150 Watt	AC 100 ~ 240 (50/60Hz)	5000K (Cool white)
Dimensions	Weight	Lifespan	Beam angle	IP rating
Ø420*128	6.5kg	50,000 Hours	53.3°	IP65

Dimensions

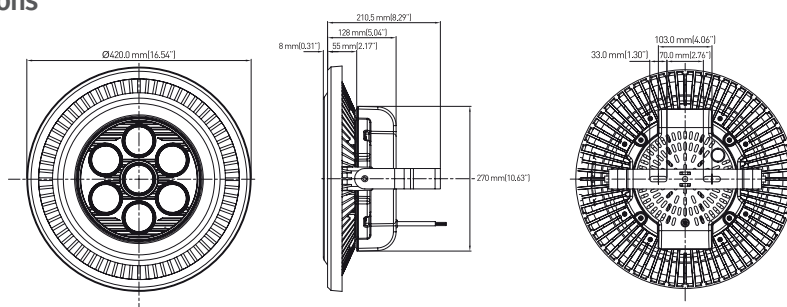

200W LED Facility Light

WDFL-17R200W




- Low power consumption
- Low CO₂ emissions
- Do not attract insects
- Long lifespan
- Low heat radiation
- No harmful material
- CREE power LEDs

Specification

Luminous flux	Efficacy	Wattage (Max)	Input voltage	Color temperature
21000lm	105lm/w	200 Watt	AC 100 ~ 240 (50/60Hz)	5000K (Cool white)
Dimensions	Weight	Lifespan	Beam angle	IP rating
Ø420*128	6.5kg	50,000 Hours	53.3°	IP65

Dimensions

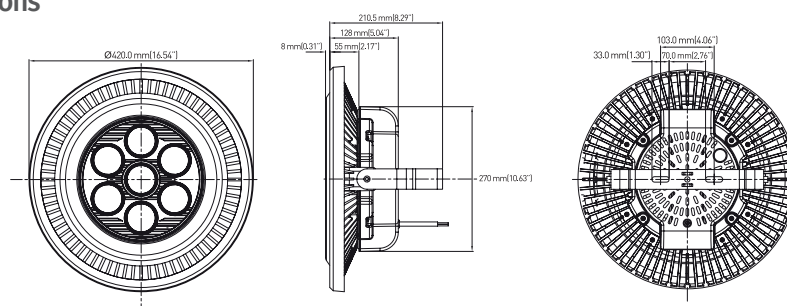

240W LED Facility Light

WDFL-17R240W



- Low power consumption
- Low CO₂ emissions
- Do not attract insects
- Long lifespan
- Low heat radiation
- No harmful material
- CREE power LEDs

Specification

Luminous flux	Efficacy	Wattage (Max)	Input voltage	Color temperature
23000lm	95.8lm/w	240 Watt	AC 100 ~ 240 (50/60Hz)	5000K (Cool white)
Dimensions	Weight	Lifespan	Beam angle	IP rating
Ø420*128	6.5kg	50,000 Hours	53.3°	IP65

Dimensions

