

# Strip Lights



**WELDEX**  
CORPORATION

# 6 Inch LED Strip Light

WDSL-6S03W




- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows

## Specification


Input voltage	Current draw (12V)		Wattage	Length	LED quantity
DC 9~36V	0.2A		2 Watt	6 inch	6
Luminous flux	Housing color	IP rating	Case material	Lifespan	Operating temperature
200lm	Silver	IP65	Aluminum	50,000 Hours	-30℃ ~ +80℃

## Dimensions

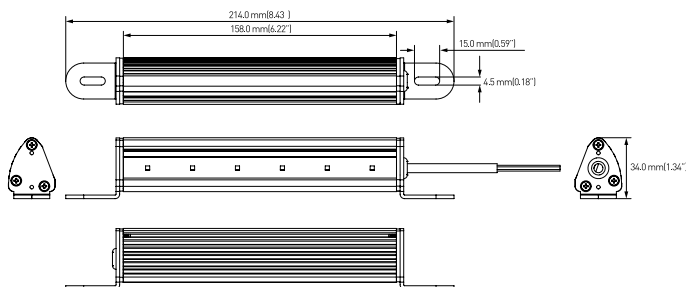

# 12 Inch LED Strip Light

WDSL-12S06W




- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows

## Specification

Input voltage	Current draw (12V)		Wattage	Length	LED quantity
DC 9~36V	0.4A		4.5 Watt	12 inch	12
Luminous flux	Housing color	IP rating	Case material	Lifespan	Operating temperature
400lm	Silver	IP65	Aluminum	50,000 Hours	-30℃ ~ +80℃

## Dimensions

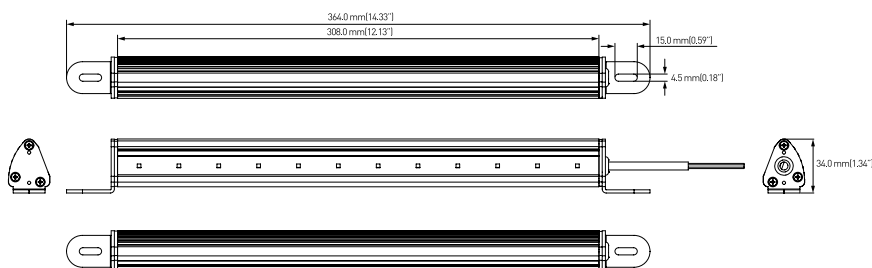

# 18 Inch LED Strip Light

WDSL-18S09W




- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows

## Specification

Input voltage	Current draw (12V)		Wattage	Length	LED quantity
DC 9~36V	0.70A		8 Watt	18 inch	18
Luminous flux	Housing color	IP rating	Case material	Lifespan	Operating temperature
600lm	Silver	IP65	Aluminum	50,000 Hours	-30℃ ~ +80℃

## Dimensions

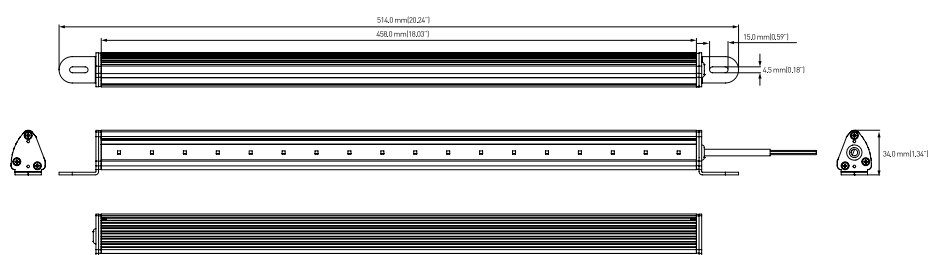

# 24 Inch LED Strip Light

WDSL-24S12W




- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows

## Specification

Input voltage	Current draw (12V)	Wattage	Length	LED quantity	
DC 9~36V	0.90A	11 Watt	24 inch	24	
Luminous flux	Housing color	IP rating	Case material	Lifespan	Operating temperature
800lm	Silver	IP65	Aluminum	50,000 Hours	-30℃ ~ +80℃

## Dimensions

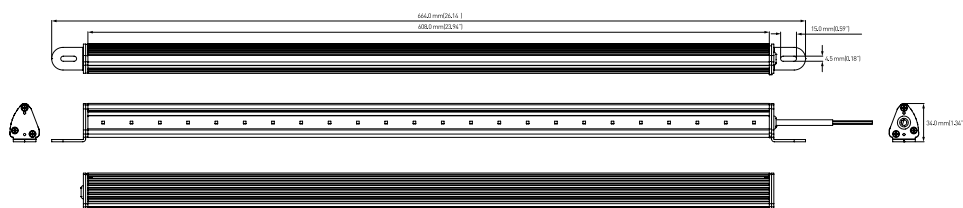

# Freezer Trailer Light

WDSL-28S10W





- Ideal for use as a ceiling or wall light in refrigerated trucks, freezer trailers, ambulances, driver cabs & storage spaces
- Aluminum + silicon coated flexible LED
- 60 \* low-power LED light source (excellent heat dissipation)

## Specification


Input voltage	Current draw (12V)	Wattage	Luminous flux	IP rating
DC 24V	0.45A	10 Watt	800lm	IP65
Lifespan	Operating temperature	Beam angle	LED quantity	Length
30,000 Hours	-30°C ~ +80°C	120°	10	1118.0±5mm

## Dimensions

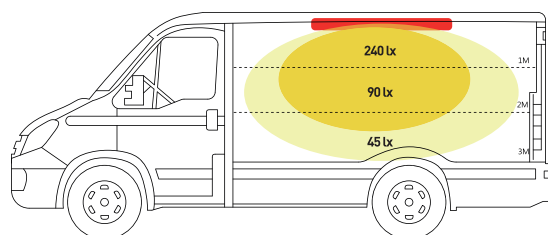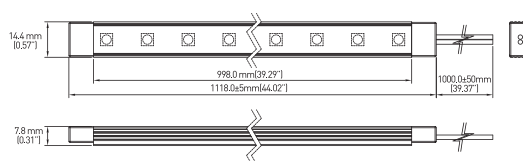

# 12 Inch LED Bar Light

WDSL-32S06W

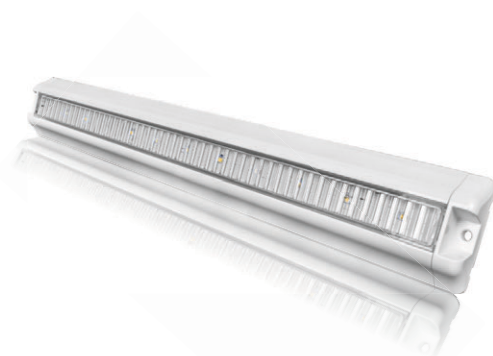


- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows
- ECE R10 certified

## Specification

Input voltage	Current draw (12V)	Wattage	Length	LED quantity	Luminous flux
DC 9~36V	0.4A	5 Watt	12.8 inch	12	400lm
Housing color	IP rating	Case material	Lifespan	Operating temperature	Color temperature
White	IP68	Aluminum	50,000 Hours	-30°C ~ +80°C	Warm/Natural/ Cool white

## Dimensions

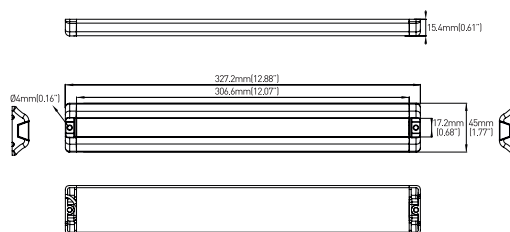

# 38 Inch LED Bar Light

WDSL-32S20W-38




- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows

## Specification

Input voltage	Current draw (12V)	Wattage	Length	LED quantity	Luminous flux
DC 9~36V	1.72A	20 Watt	38.58 inch	48	1600lm
Housing color	IP rating	Case material	Lifespan	Operating temperature	Color temperature
White	IP68	Aluminum	50,000 Hours	-30℃ ~ +80℃	Warm/Natural/ Cool white

## Dimensions

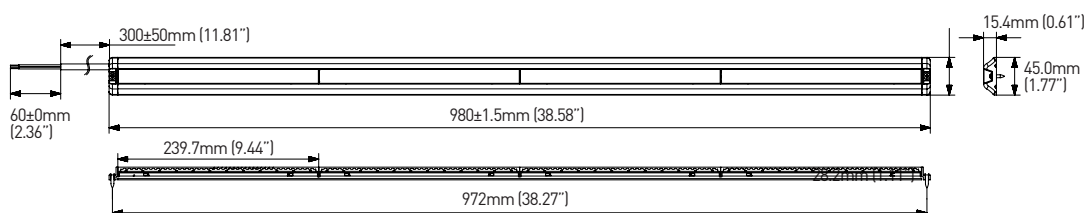

# 12 Inch LED Bar Light with Switch

WDSL-34S06W-12



- Strip provides even light throughout the truck body
- Less current draw
- Brighter, whiter LED provides more realistic view
- Fits anywhere
- Does not flicker like fluorescent lighting
- Eliminates shadows
- Easy ON/OFF by push button

## Specification

Input voltage	Current draw (12V)	Wattage	Length	LED quantity	Luminous flux
DC 9~36V	0.41A	6 Watt	11.37 inch	12	400lm
Housing color	IP rating	Case material	Lifespan	Operating temperature	Color temperature
White	IP68	Aluminum	50,000 Hours	-30℃ ~ +80℃	Warm/Natural/ Cool white

## Dimensions

