


#12

3-PLY 330# 1/4 X 1/16 GRADE 2

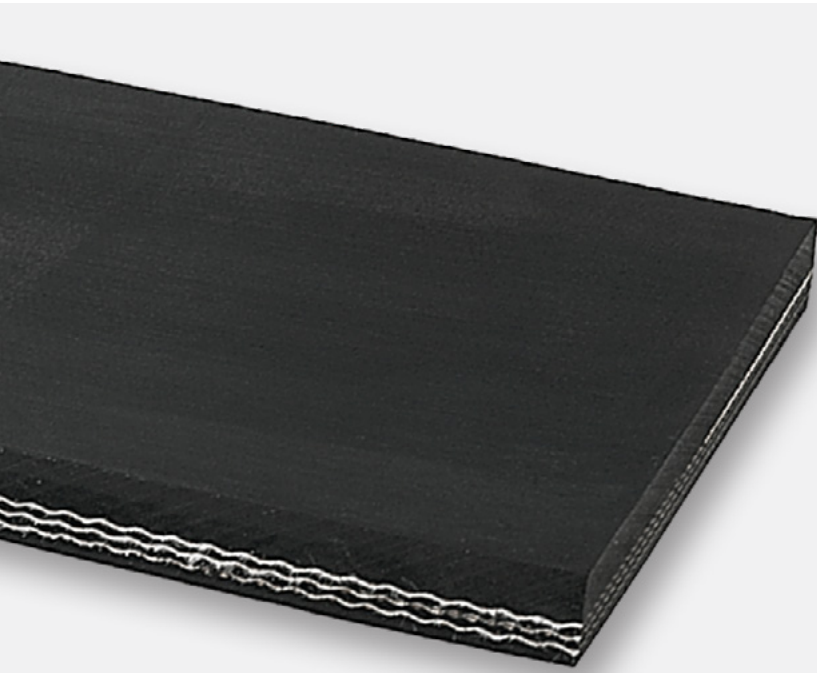

FEATURES

Popular heavy-duty belt where additional top cover protection is needed for better abrasion and gouge resistance. Widely used in aggregate and mining applications.

APPLICATIONS

- Aggregate
- Wood/Lumber
- Cement
- Recycling

SPECIFICATIONS

| | |
|----------------------|-----------------|
| Plies | 3 |
| Working Strength | 330 |
| Color | Black |
| Material | SBR |
| Carcass | Polyester/Nylon |
| Top Cover | Smooth |
| Bottom Cover | Smooth |
| Profile | N/A |
| Thickness | 15/32" |
| Weight PIW | 0.215 |
| Min. Pulley Diameter | 16" |
| Max. Elongation | 1-2% |
| Temperature Range | -25°F to 225°F |
| Fire Resistant | N/A |
| Oil Resistant | No |
| Anti-Static | No |
| Durometer | 60 +/- 5 |

RECOMMENDED SPLICE

| | |
|--------------------------|-----------|
| Flexco® Bolt Solid Plate | 190 |
| Flexco® Bolt Rivet Plate | BR6 |
| Flexco® Rivet Hinge | R5 |
| Super-Screw® | 63, 65 |
| Endless Splice | Bias Step |