


#23A

2-PLY 220# 1/16 X 1/16 STATIC-CONDUCTIVE OIL-RESISTANT
FIRE-RETARDANT GRAIN

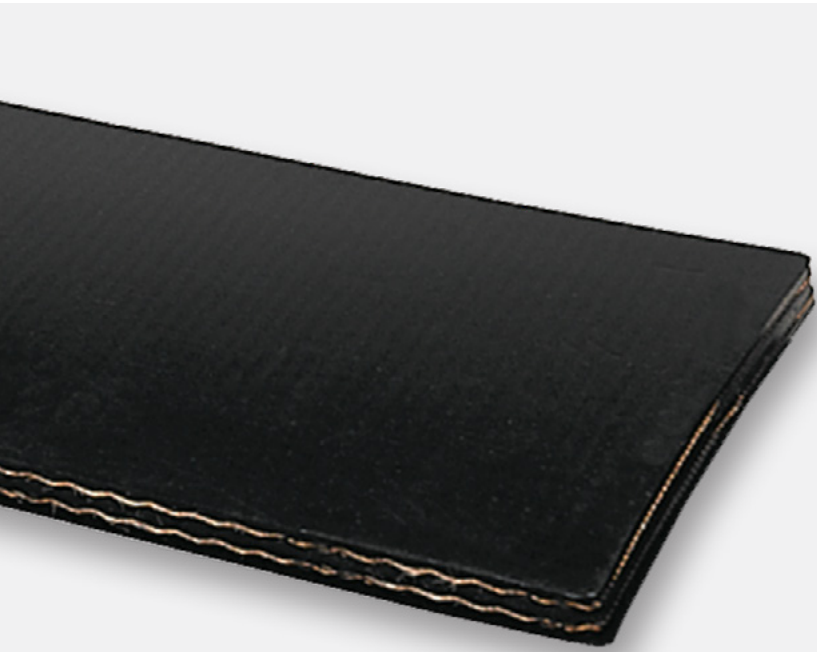

FEATURES

Special compounds in this belt make it an excellent choice for handling grain and other applications requiring resistance to mineral, animal, or vegetable fats. It is also static conductive and MSHA approved for use on grain conveyors and in grain elevators where static charges must be held to minimums. Belt is flame retardant.

APPLICATIONS

- Grain
- Bucket Elevator

SPECIFICATIONS

Plies	2
Working Strength	220
Color	Black
Material	Nitrile
Carcass	Polyester/Nylon
Top Cover	Smooth
Bottom Cover	Smooth
Profile	N/A
Thickness	15/64"
Weight PIW	0.16
Min. Pulley Diameter	12" (24" Elevator)
Max. Elongation	1-2%
Temperature Range	-25°F to 250°F
Fire Resistant	Yes
Oil Resistant	Yes
Anti-Static	Yes
Durometer	60 +/- 5

RECOMMENDED SPLICE

Ready Set™ Staple	RS187
Flexco® Bolt Solid Plate	140
Flexco® Bolt Rivet Plate	BR6
Flexco® Rivet Hinge	R2
Super-Screw®	63, 65
Endless Splice	Bias Step