


# #43A

3-PLY 330# 1/4 X 1/16 700° SUPER-HEAT

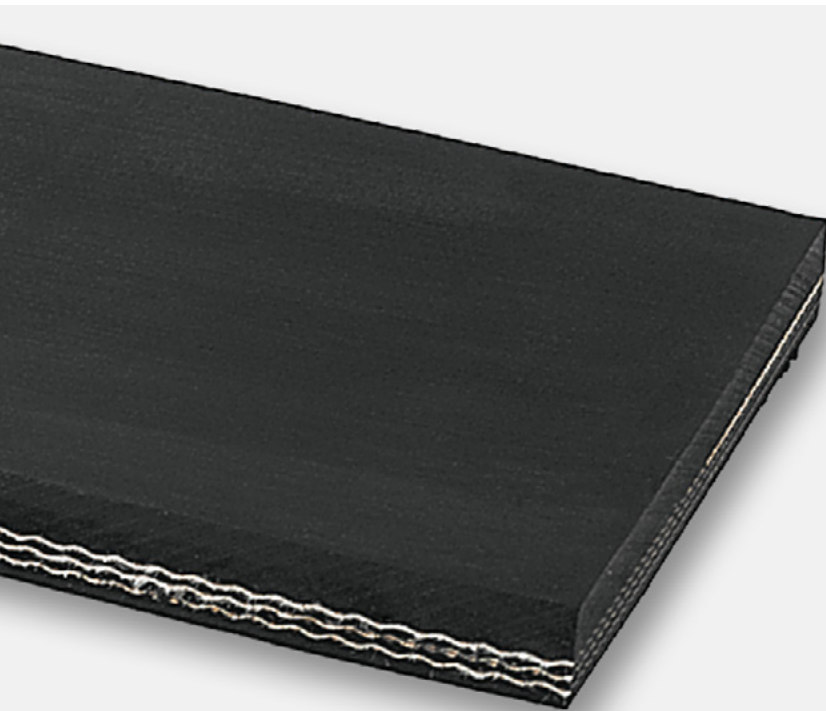

## FEATURES

Premium belt for higher temperature requirements. Popular in cement and foundry applications. 1/4" top cover provides impact resistance and added carcass protection. Will withstand spikes up to 700°F. Max operating temperature for fines and dense baking loads is 500°F.

## APPLICATIONS

- Hot Cement
- Iron Ore
- Sand Casting
- Sewage

## SPECIFICATIONS

Plies	3
Working Strength	330
Color	Black
Material	EPDM
Carcass	Polyester/Nylon
Top Cover	Smooth
Bottom Cover	Smooth
Profile	N/A
Thickness	15/32"
Weight PIW	0.232
Min. Pulley Diameter	18" (20" Elevator)
Max. Elongation	1-2%
Temperature Range	-20°F to 700°F 700°F for 2" lumps and above, 500°F for fines and dense/baking loads
Fire Resistant	N/A
Oil Resistant	No
Anti-Static	No
Durometer	60 +/- 5

## RECOMMENDED SPLICE

Flexco® Bolt Solid Plate	190
Flexco® Bolt Rivet Plate	BR6
Flexco® Rivet Hinge	R5-1/2
Super-Screw®	63, 65
Endless Splice	Bias Step