


#56B

2-PLY 220# 1/8 X BARE BACK DUROCLEAT MODERATE OIL RESISTANCE

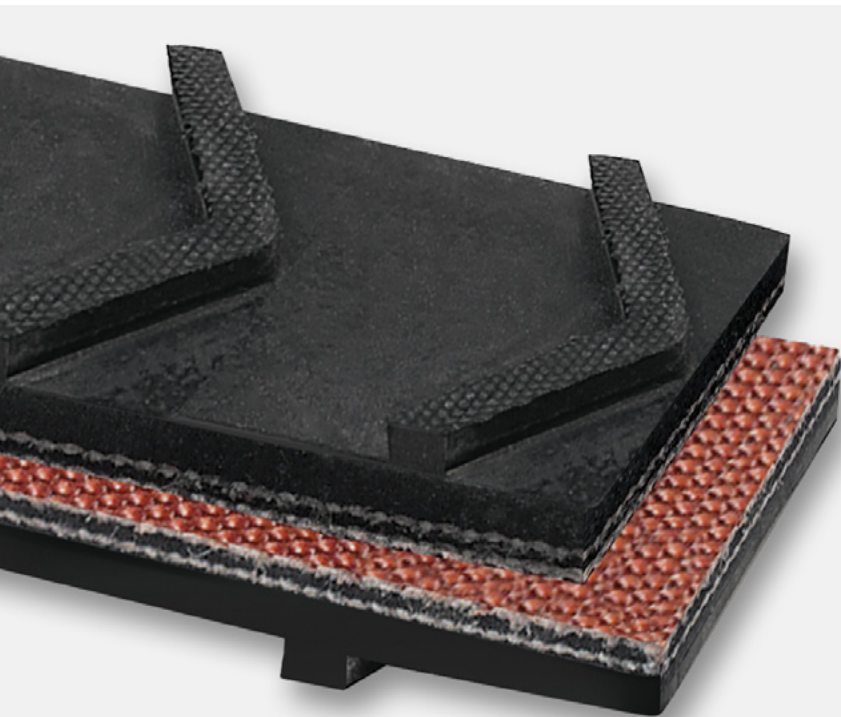

FEATURES

1/4" high x 3/8" wide x 6" overall width molded chevron cleats running the full width of the belt. Designed to run on pan conveyors and metal beds. Very popular in recycling and wood products applications.

APPLICATIONS

- Recycling
- Wood Processing
- Road Construction
- Grain Handling

SPECIFICATIONS

| | |
|----------------------|-----------------|
| Plies | 2 |
| Working Strength | 220 |
| Color | Black |
| Material | NBR Blend |
| Carcass | Polyester/Nylon |
| Top Cover | Molded Chevron |
| Bottom Cover | Bare |
| Profile | 1/4" x 3/8" |
| Thickness | 1/4" |
| Weight PIW | 0.185 |
| Min. Pulley Diameter | 10" |
| Max. Elongation | 1-2% |
| Temperature Range | -25°F to 250°F |
| Fire Resistant | N/A |
| Oil Resistant | Yes |
| Anti-Static | No |
| Durometer | 60 +/- 5 |

RECOMMENDED SPLICE

| | |
|---------------------|-----------|
| Flexco® Bolt Hinge | 550 |
| Flexco® Rivet Hinge | R2 |
| Super-Screw® | 63, 65 |
| Endless Splice | Bias Step |