


#71

2-PLY 220# CONTINUOUS CHEVRON TOP X BARE BACK

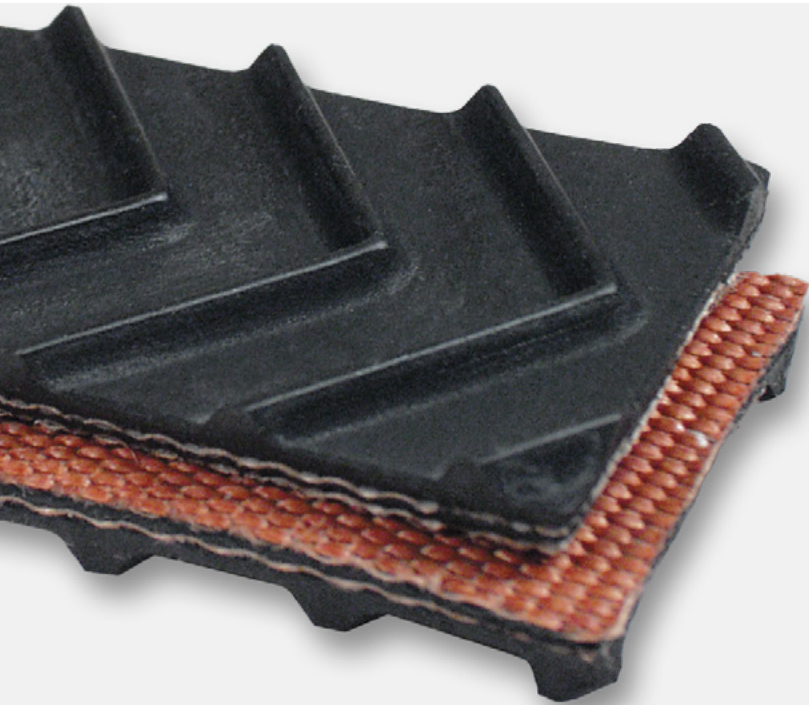

FEATURES

Versatile belting with great flexibility and low temperature rating. Excellent choice for conveying sand, grain and other bulk materials. Popular for railroad car unloading and tubeveyor applications.

APPLICATIONS

- Agriculture
- Incline
- Aggregate
- Package Handling

SPECIFICATIONS

Plies	2
Working Strength	220
Color	Black
Material	SBR
Carcass	Polyester
Top Cover	1/8" Chevron Ribs
Bottom Cover	Bare
Profile	N/A
Thickness	0.275"
Weight PIW	0.115
Min. Pulley Diameter	3"
Max. Elongation	1.5-2%
Temperature Range	-40°F to 225°F
Fire Resistant	No
Oil Resistant	No
Anti-Static	No
Durometer	60

RECOMMENDED SPLICE

Flexco® Rivet Hinge	R2
Super-Screw®	63, 65
Endless Splice	Bias Step