


#281

2-PLY 220# 3/16 X 1/16 DUROCHEV WITH 5/8 HIGH X 16 OVERALL WIDTH MOLDED CHEVRONS

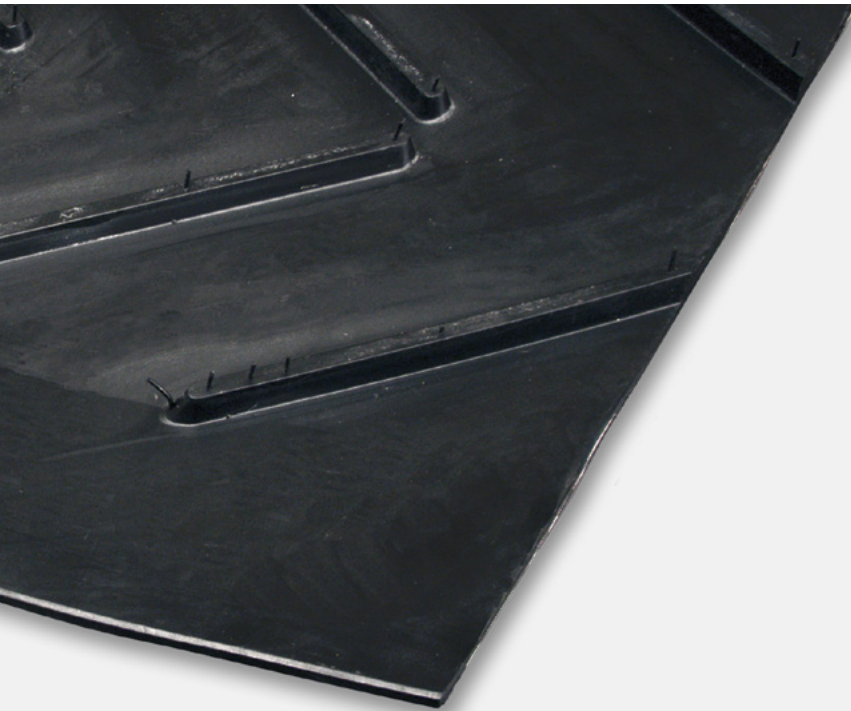

FEATURES

Popular 5/8" high molded chevron cleats on 10" centers. Designed for rugged incline applications and popular for conveying rock, sand and gravel. Cleats recessed from belt edges allow for placement of skirting.

APPLICATIONS

- Aggregate
- Road Construction

SPECIFICATIONS

Plies	2
Working Strength	220
Color	Black
Material	SBR
Carcass	Polyester/Nylon
Top Cover	Molded Chevron
Bottom Cover	Smooth
Profile	5/8" x 16" Overall Width Chevron
Thickness	3/8"
Weight PIW	0.5
Min. Pulley Diameter	14"
Max. Elongation	1-2%
Temperature Range	-25°F to 200°F
Fire Resistant	N/A
Oil Resistant	No
Anti-Static	No
Durometer	60 +/- 5

RECOMMENDED SPLICE

Flexco® Bolt Solid Plate	140
Flexco® Bolt Rivet Plate	BR6
Flexco® Bolt Hinge	550
Flexco® Rivet Hinge	R2
Super-Screw®	63, 65
Endless Splice	Bias Step