


#284

4-PLY 440# 1/4 X 3/32 450° MAXI-HEAT

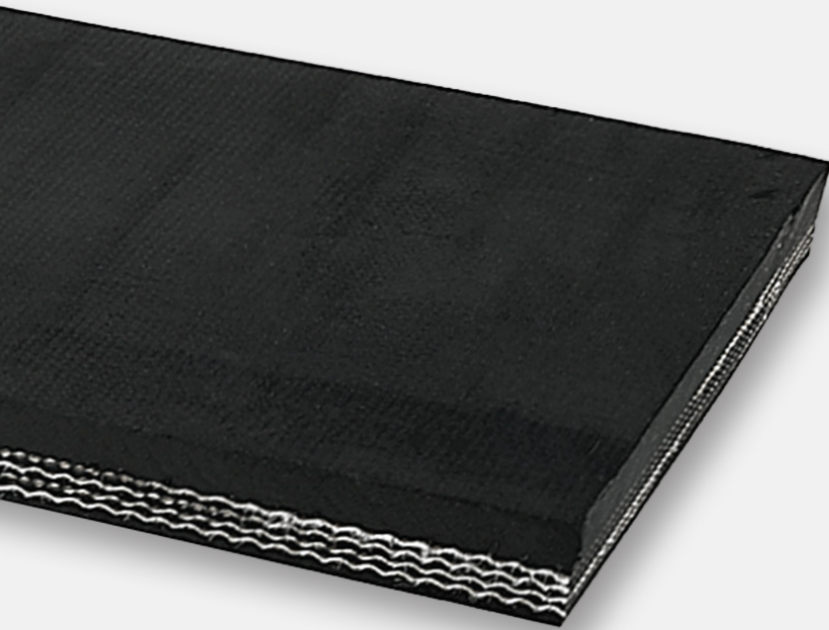

FEATURES

High-tension 4-ply belt designed for heavy-duty elevator service to transport hot material. Thick top and bottom covers withstand heat and protect belt carcass. Will withstand spikes up to 450°F. Max operating temperature for fines and dense baking loads is 300°F.

APPLICATIONS

- Hot Cement
- Iron Ore
- Sand Casting
- Sewage

SPECIFICATIONS

Plies	4
Working Strength	440
Color	Black
Material	EPDM
Carcass	Polyester/Nylon
Top Cover	Smooth
Bottom Cover	Smooth
Profile	N/A
Thickness	9/16"
Weight PIW	0.295
Min. Pulley Diameter	20" (24" Elevator)
Max. Elongation	1-2%
Temperature Range	-20°F to 700°F 450°F for 2" lumps and above, 300°F for fines and dense/baking loads
Fire Resistant	N/A
Oil Resistant	No
Anti-Static	No
Durometer	65

RECOMMENDED SPLICE

Flexco® Bolt Rivet Plate	BR10
Flexco® Rivet Hinge	R5-1/2
Super-Screw®	80, 85
Endless Splice	Bias Step