


#400

4-PLY 800# 3/8 X 1/8 GRADE 1

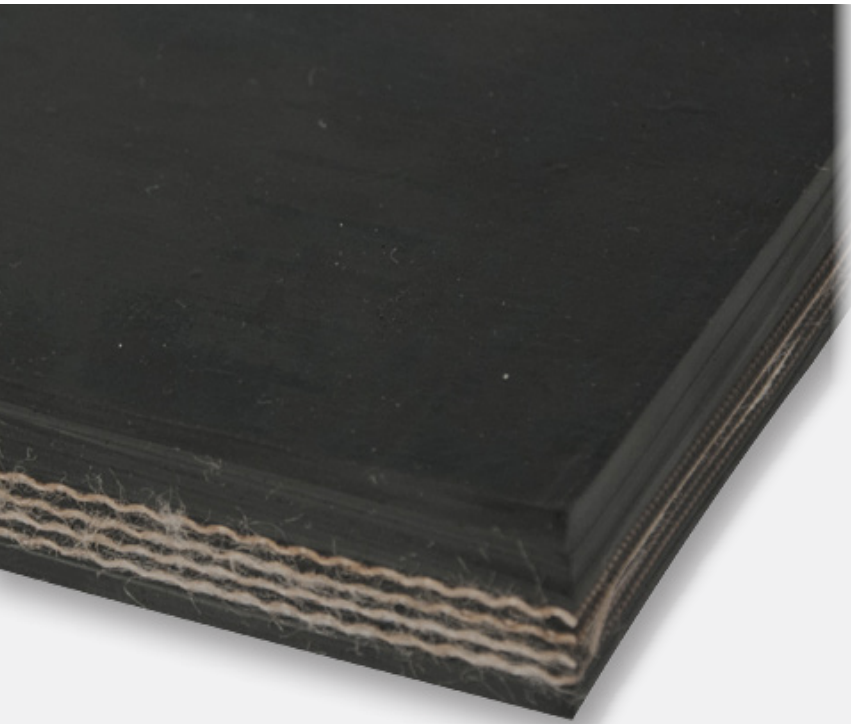

SPECIFICATIONS

Plies	4
Working Strength	800
Color	Black
Material	SBR
Carcass	Polyester/Nylon
Top Cover	Smooth
Bottom Cover	Smooth
Profile	N/A
Thickness	3/4"
Weight PIW	0.44
Min. Pulley Diameter	24" (36" Elevator)
Max. Elongation	1.5-2%
Temperature Range	-25°F to 225°F
Fire Resistant	No
Oil Resistant	No
Anti-Static	No
Durometer	60

FEATURES

Popular high-tension belting with strong, low-stretch polyester/nylon carcass. Thick Grade 2 covers offer good abrasion resistance and durability. Excellent choice for mining, aggregate, glass and cement.

APPLICATIONS

- Mining
- Aggregate
- Glass
- Cement

RECOMMENDED SPLICE

Flexco® Rivet Hinge	R6
Super-Screw®	180
Endless Splice	Bias Step