


#5065

INTERWOVEN 250# POLYESTER BLACK PVC COVER X COVER
FIRE-RETARDANT STATIC-CONDUCTIVE

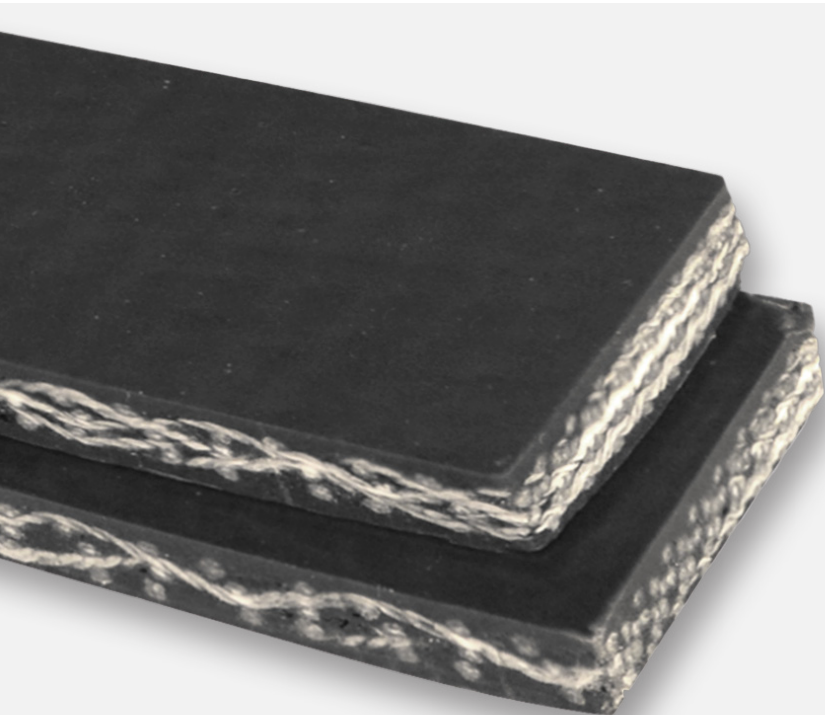

FEATURES

Commonly used for elevator belting in the feed and grain industries. Oil resistant, fire retardant and static conductive. This belt will not mildew or rot, MSHA approved, moisture resistant and has high bolt retention for bucket attachments.

APPLICATIONS

- Package Handling
- Horizontal
- Bulk Handling
- Grain
- Bucket Elevator

SPECIFICATIONS

Plies	1
Working Strength	250
Color	Black
Material	PVC
Carcass	Interwoven Polyester
Top Cover	Cover
Bottom Cover	Cover
Thickness	0.266"
Weight PIW	0.145
Min. Pulley Diameter	7" (9" Elevator)
Max. Elongation	1-2%
Temperature Range	0°F to 180°F
Fire Resistant	Yes
Oil Resistant	No
Antistatic	Yes

RECOMMENDED SPLICE

Clipper® Hook	U5
Alligator® Lacing	27
Ready Set™ Staple	RS187
Flexco® Bolt Solid Plate	140
Flexco® Bolt Rivet Plate	BR6
Flexco® Bolt Hinge	550
Flexco® Rivet Hinge	R5
Endless Splice	Finger, Skive