


#5072

INTERWOVEN 350# POLYESTER BLACK PVC COVER X COVER
FIRE-RETARDANT STATIC-CONDUCTIVE

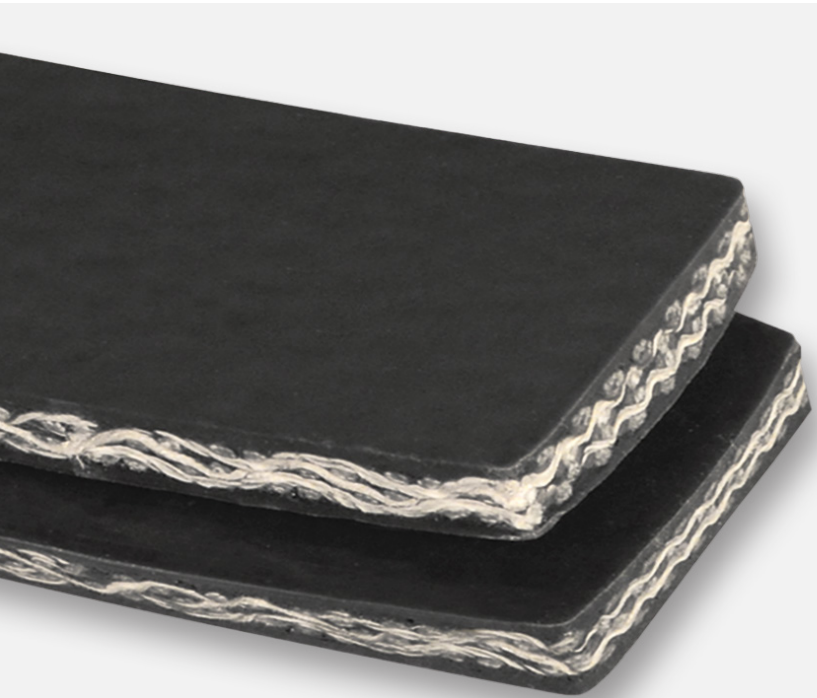

FEATURES

Fire-retardant, static-conductive belt commonly used for elevator belting in the feed and grain industries. Features low stretch, trouble-free operation, high bolt retention and resistance to grain oils, fire, moisture and mildew. MSHA approved.

APPLICATIONS

- Package Handling
- Horizontal
- Bulk Handling
- Grain
- Bucket Elevator

SPECIFICATIONS

Plies	1
Working Strength	350
Color	Black
Material	PVC
Carcass	Interwoven Polyester
Top Cover	Cover
Bottom Cover	Cover
Thickness	0.313"
Weight PIW	0.15
Min. Pulley Diameter	8"
Max. Elongation	1-2%
Temperature Range	0°F to 180°F
Fire Resistant	Yes
Oil Resistant	No
Antistatic	Yes

RECOMMENDED SPLICE

Clipper® Hook	U5
Flexco® Bolt Solid Plate	140
Flexco® Bolt Rivet Plate	BR6
Flexco® Bolt Hinge	550
Flexco® Rivet Hinge	R5