


#73

INTERWOVEN 450# POLYESTER BLACK PVC COVER X COVER FIRE-RETARDANT STATIC-CONDUCTIVE

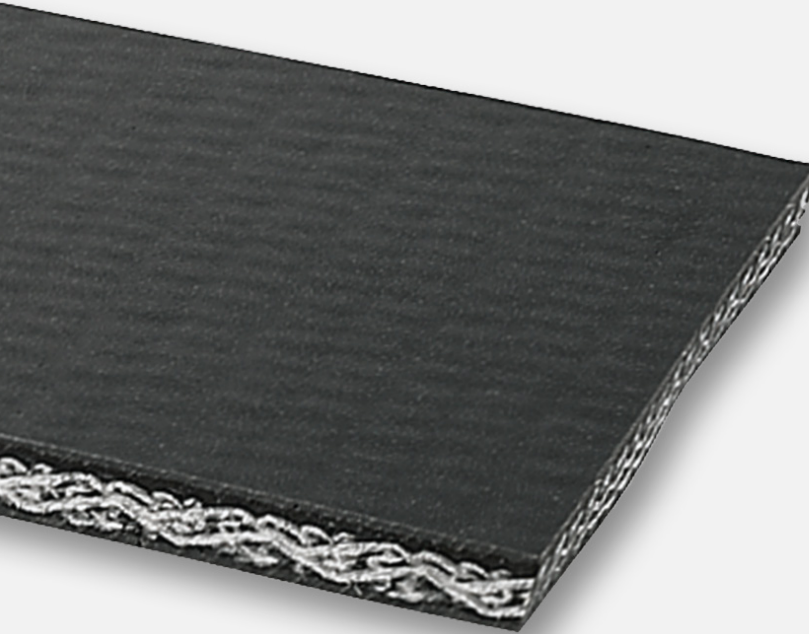

FEATURES

Commonly used for elevator belting in the feed and grain industries. Features low stretch, trouble-free operation, high bolt retention, and resistance to grain oils, fire, moisture, mildew, and rot. MSHA approved.

APPLICATIONS

- Package Handling
- Horizontal
- Bulk Handling
- Grain
- Bucket Elevator

SPECIFICATIONS

Plies	1
Working Strength	450
Color	Black
Material	PVC
Carcass	Interwoven Polyester
Top Cover	Cover
Bottom Cover	Cover
Thickness	0.344"
Weight PIW	0.16
Min. Pulley Diameter	10"
Max. Elongation	1-2%
Temperature Range	0°F to 180°F
Fire Resistant	Yes
Oil Resistant	Yes
Antistatic	Yes

RECOMMENDED SPLICE

Alligator® Lacing	45
Flexco® Bolt Solid Plate	190
Flexco® Bolt Hinge	550
Flexco® Rivet Hinge	R5