


#90

INTERWOVEN 90# POLYESTER RED URETHANE COVER X BRUSHED (NOVEX)

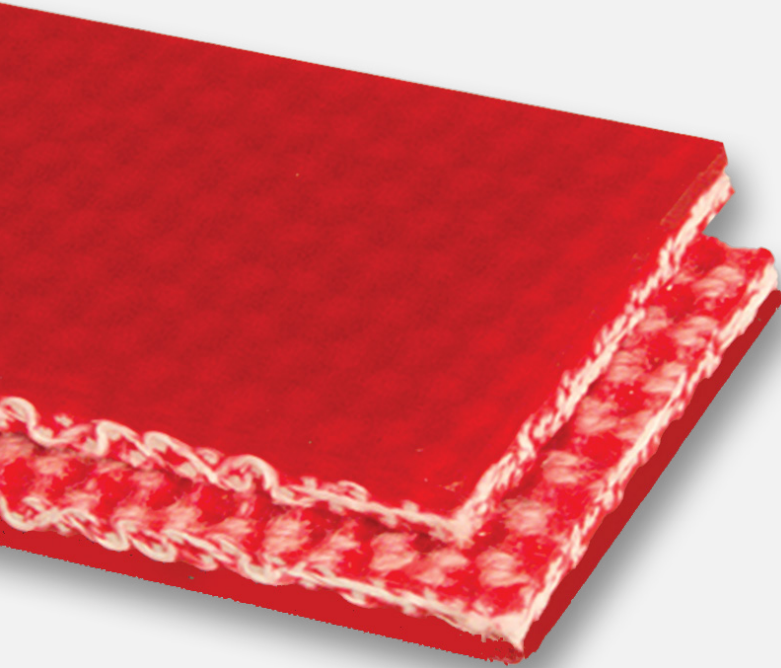

FEATURES

This versatile specification has a tough urethane cover and is used widely in the recycling industry due to its resistance to cutting, gouging and chemicals. The urethane compound throughout this belt allows for both finger and welded seam splices.

APPLICATIONS

- Package Handling
- Horizontal
- Die-Cutting
- Metal Stamping
- Recycling

SPECIFICATIONS

Plies	1
Working Strength	90
Color	Red
Material	Urethane
Carcass	Interwoven Polyester
Top Cover	Urethane
Bottom Cover	Urethane Brushed
Thickness	0.125"
Weight PIW	0.075
Min. Pulley Diameter	2"
Max. Elongation	1-2%
Temperature Range	20°F to 180°F
Oil Resistant	Yes
Antistatic	No
Food Suitability	N/A

RECOMMENDED SPLICE

Alligator® Lacing	25
Ready Set™ Staple	RS125
Plastic Rivet	APF-100 W
Endless Splice	Finger, Skive