


#4121

3-PLY 105# COTTON/POLYESTER RED SBR HS&W SILICONE COVER X BARE

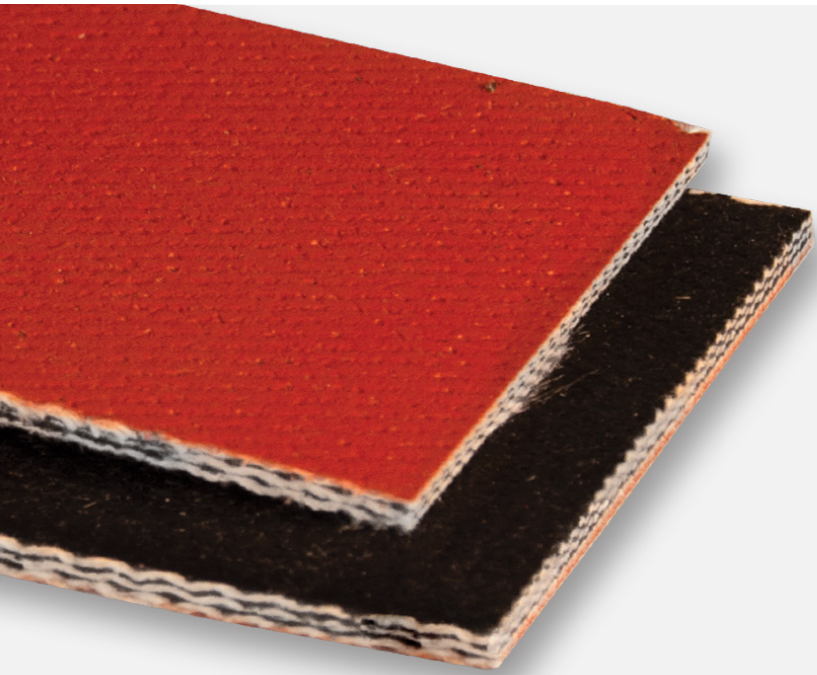

SPECIFICATIONS

Plies	3
Working Strength	105
Color	Red
Material	SBR
Carcass	Cotton/Polyester
Top Cover	Smooth
Bottom Cover	Bare
Thickness	0.152"
Weight PIW	0.054
Min. Pulley Diameter	4"
Max. Elongation	2%
Temperature Range	-20°F to 350°F intermittent cover contact, -20°F to 250°F
Oil Resistant	No
Antistatic	No

RECOMMENDED SPLICE

Clipper® Hook	U2SP
Alligator® Lacing	15
Ready Set™ Staple	RS125
Plastic Rivet	APF-150 W
Endless Splice	Bias Step

FEATURES

Designed for use where higher product temperatures are required and good release is needed. Used primarily in tire plants, this hot stock and water belt is also used in applications with uncured rubber and other sticky products. This product also has many package handling uses.

APPLICATIONS

- Package Handling
- Tire
- Rubber