


#4126

3-PLY 200# POLYESTER/NYLON BLACK SBR BARE X BARE FIRE
RETARDANT

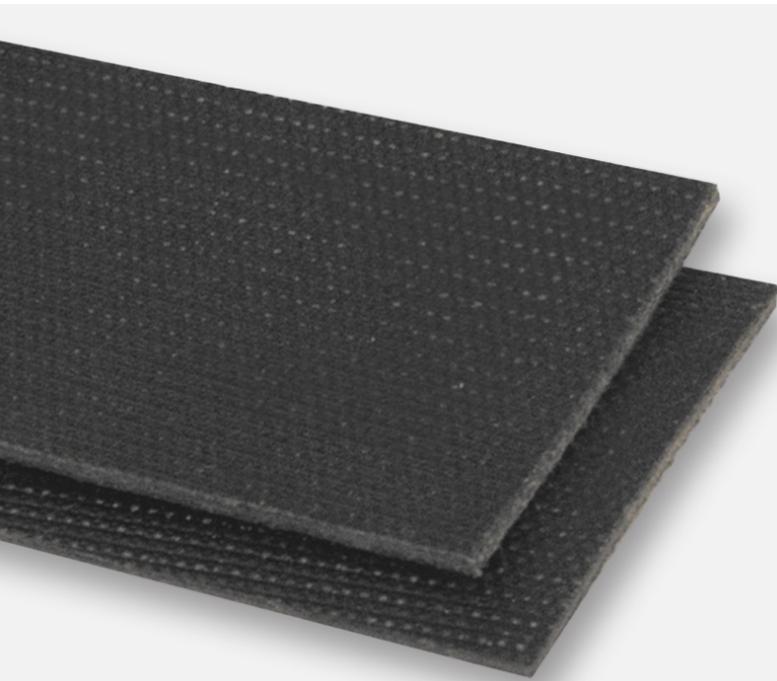

SPECIFICATIONS

Plies	3
Working Strength	200
Color	Black
Material	SBR
Carcass	Polyester/Nylon
Top Cover	Bare
Bottom Cover	Bare
Thickness	0.158"
Weight PIW	0.086
Min. Pulley Diameter	4"
Max. Elongation	1-2%
Temperature Range	0°F to 250°F
Fire Resistant	Yes
Oil Resistant	No
Antistatic	No

RECOMMENDED SPLICE

Clipper® Hook	U2
Alligator® Lacing	15
Ready Set™ Staple	187
Endless Splice	Bias Step

FEATURES

This belt is great where package handling applications require products to slide, discharge, or merge on the surface of a belt with a low-friction cover. It is the most widely used belt with a bare x bare construction. Since it is fire retardant, it is especially suitable for use at UPS, FedEx, and airports.

APPLICATIONS

- Package Handling
- Horizontal
- Accumulation
- Diverting
- Fire Resistant