


#4154

NEEDED 135# POLYESTER GREEN NITRILE FRICTION X BRUSHED

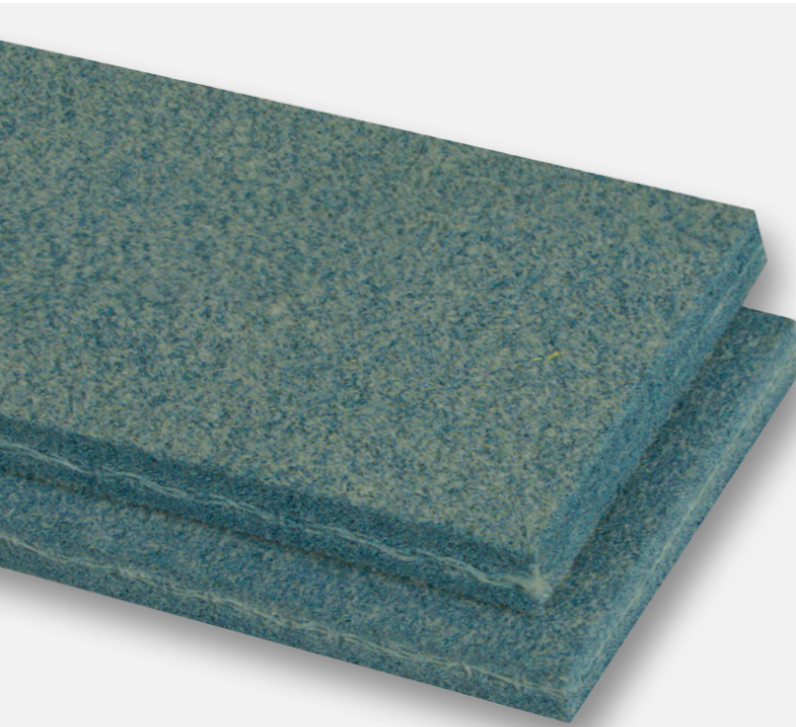

FEATURES

Polyester uni-ply construction, impregnated with nitrile that offers excellent service in tough stamping operations. Excellent tracking and oil resistance.

APPLICATIONS

- Package Handling
- Horizontal
- Metal Stamping
- Lumber

SPECIFICATIONS

Plies	1
Working Strength	135
Color	Green
Material	Nitrile
Carcass	Needled Polyester
Top Cover	Buffed
Bottom Cover	Buffed
Thickness	0.22"
Weight PIW	0.07
Min. Pulley Diameter	5"
Max. Elongation	1-2%
Temperature Range	10°F to 175°F
Oil Resistant	Yes
Antistatic	No
Food Suitability	N/A

RECOMMENDED SPLICE

Clipper® Hook	U3
Alligator® Lacing	20
Ready Set™ Staple	RS187
Plastic Spiral	ASL90
Plastic Rivet	APF-150 W Recess
Endless Splice	Skive, Bias Step