


#4392

2-PLY 100# SPUN POLYESTER BLACK PVC PEBBLETOP X FRICTION

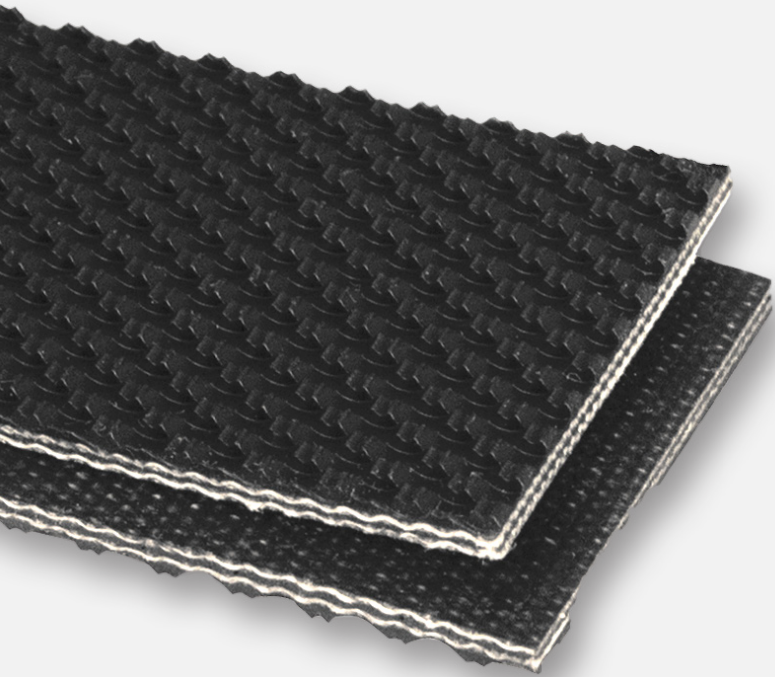

FEATURES

Pebbletop impression is used when more traction is called for, but a rough top belt is too much. Popular in wood products and metal stamping.

APPLICATIONS

- Package Handling
- Horizontal

SPECIFICATIONS

Plies	2
Working Strength	100
Color	Black
Material	PVC
Carcass	Polyester
Top Cover	Impression
Bottom Cover	Friction
Thickness	0.115"
Weight PIW	0.07
Min. Pulley Diameter	1.5"
Max. Elongation	1-2%
Temperature Range	20°F to 180°F
Oil Resistant	Yes
Antistatic	No
Food Suitability	N/A

RECOMMENDED SPLICE

Clipper® Hook	UX-1
Alligator® Lacing	7
Ready Set™ Staple	RS125
Plastic Spiral	ASL90
Plastic Rivet	APF-150 B
Endless Splice	Finger, Skive