CONVEYANCE SOLUTIONS

SUPER-SCREW® FASTENERS




Quick and easy to install, even in challenging access situations. Super-Screw[®] fasteners combine the strength and dependability of a vulcanized splice without the costly downtime.



- · Quick installation
- · Cost effective
- No drilling preparation or templates
- Compatible with scrapers
- Prevents material loss
- Abrasion and cut resistant

AVAILABLE COMPOUNDS

- Antimagnetic
- FDA/USDA certified
- Fire retardant and antistatic
- Heat resistant
- Low temperature
- Oil resistant

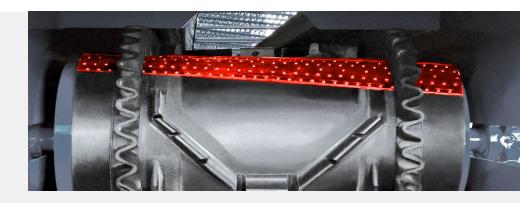

STURDY CONSTRUCTION

Super-Screw® fasteners attach to the belt with special self-tapping screws that allow the carcass threads to spread without cutting completely through them. Constructed of multi-ply rubber with a variety of belt tensions, this fastener can be fitted to your belt whether using from the start or patching repairs.

AVAILABLE TWO WAYS

Ready to Install

- · Lengths up to 10' with preinstalled spacers
- Includes screws and PZ bit for instant install

On a Roll

- Separate top/bottom coils in lengths up to 82'
- Does not include spacers, screws or a PZ bit



SPECIFICATIONS

	Super-Screw Types	35	63	65	80	85	100	105	125	127	180	200
	Belt Thickness	5/32"	5/32"- 1/2"	5/32"- 1/2"	5/32"- 19/32"	5/32"- 19/32"	5/32"- 19/32"	5/32"- 4/32"	9/32"- 13/16"	9/32"- 13/16"	9/32"- 13/16"	9/32"- 3/4"
	Max. Belt Strength (N/mm)	315	630	630	800	800	1,000	1,000	1,250	1,500	1,800	2,000
	Max. Belt Tension (PIW)	200	360	360	460	460	570	570	710	710	1,000	1,150
	Min. Pulley Ø	6"	8"	8"	10"	10"	12"	12"	12"	12"	16"	20"
	Top Thickness	5/32"	3/16"	15/64"	15/64"	9/32"	9/32"	11/32"	9/32"	11/32"	9/32"	11/32"
	Bottom Thickness	5/32"	11/64"	11/64"	7/32"	7/32"	7/32"	7/32"	15/64"	15/64"	15/64"	15/64"

Partners. The Best Part of All.®



