




CONTI® CLEANJET - FDA

Cleans at high pressure

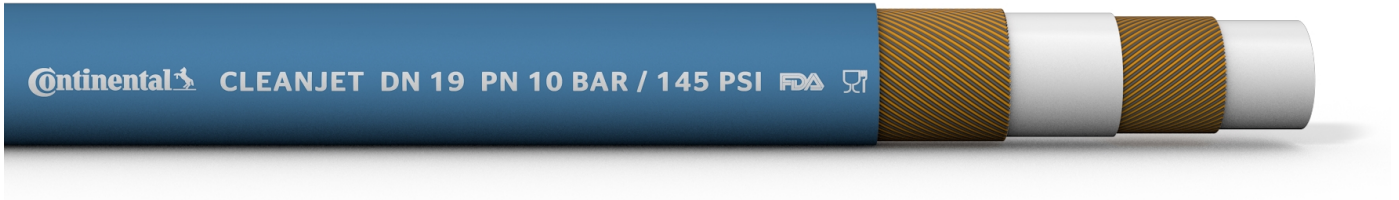

MARKING: on a blue background "Continental CLEANJET DN 19 PN 10 BAR / 145 PSI FDA Glas-/Gabel-Symbol EG 1935/2004 2023/2006 Made in Germany"

APPLICATIONS

Abattoirs, Beverage industry, Commercial kitchens, Foodstuff industry, Large-scale butcheries

FLOW MEDIUM

Hot water, Liquid oily and fatty foods, Water

STANDARD / APPROVAL



DESCRIPTION

Inner lining: NBR, bright, non-porous, smooth

Reinforcements: Synthetic fibres

Cover: NBR, blue, smooth, abrasion resistant, resistant to chicken and fish fat, resistant to ozone, weather and UV

Working pressure up to: 90 bar / 1305 psi

Temperature range: from -20 °C / -4 °F up to +80 °C / +176 °F

Dampable up to: +164 °C / +327 °F
up to 6 bar / 87 psi - open system only

Further properties: Highly flexible

Further properties: Recommended fittings system DINGA® water saving gun for hot water applications

TECHNICAL DATA

nominal width zoll/inch	inner-Ø mm	wall thickness mm	outer-Ø mm	length m	working pressure		min. burst pressure		min. bending radius aprx. mm	weight aprx. g/ m
					bar	psi	bar	psi		
3/8	9,5	4,5	18,5	> 10	90	1305	360	5221	70	270
1/2	12,5	4,75	22	> 10	90	1305	360	5221	80	335
1/2	13	4	21	40	10	145	30	435	130	320
5/8	15	4,5	24	40	10	145	30	435	150	425
3/4	19	4,5	28	40	10	145	30	435	190	460

Pressure data relate to room temperature / High pressures and/or temperatures reduce the service life