

# AVENTICS™ 580 CHARM node and Delta V™ Distributed Control System (DCS) Integrated Solution

Life Sciences Automation Solutions

**FLUID POWER SOLUTIONS**



## Single connection from the field to the DeltaV DCS

- Eliminates the need for an additional network such as Profibus-DP to connect pneumatic valve systems to the DeltaV DCS; connects directly to the CHARMs base plate
- Provides cost savings by reducing wiring, components, labor and software programming, and eliminates a need for an additional fieldbus communication module
- 580 CHARM coil capacity can pilot up to 96 process valves

## Easy configuration and diagnostics in DeltaV DCS

- All configuration work is done in the same, easy-to-use, task-based engineering environment that the DeltaV DCS users are already familiar with
  - The AVENTICS 580 Characterization Module (CHARM) node configures just like any other CHARM
- Uses native capability of the DeltaV DCS for diagnostics of pneumatic valves
- Diagnostic and prognostic feedback from the 580 CHARM node is communicated directly back to the DeltaV explorer

**AVENTICS™**

  
**EMERSON™**

**CONSIDER IT SOLVED™**

## Redundant communication and power

- The AVENTICS 580 CHARM node brings CIOC (CHARM I/O Card) redundant communication and power connections to pneumatic valve manifolds via existing CHARM baseplate
  - Adds control reliable communication functionality
  - Only Emerson can offer this capability on a single network

## Provides a complete Emerson system solution

- A single connection to the DeltaV system with Electronic Marshalling means a tightly integrated solution for I/O and pneumatic valve manifolds where there is no need for additional configuration tools and various network familiarity
- Offers users single point responsibility for products, documentation and support
- The AVENTICS 580 CHARM node utilizes the same hardware platform as the CHARMs device to guarantee interoperability
- Our Integrated Solutions are suitable for Zone 2-22 applications
- Solenoid valve and CHARM I/Os can be controlled by any controller listed on the DCS cloud network.

## Proven pneumatic valve piloting solutions to meet end-user challenges

- Streamline connectivity between pneumatic valve manifold, CHARM I/O and DeltaV(TM) DCS provides value-add that's unmatched in the market (single supplier)
- Local graphic display to assist with start up and commissioning of the valve manifold
- Easy to read (plain language) feedback information which is available via both the graphic display (local) and the DeltaV explorer (online)
- Resistant metal override for repeated use
- LED on each side allow easy way to identify coil status of the valve
- Individual pressure shut-off allow valve replacement without interrupting the process
- Compact footprint to optimize cabinet spacing



Example: Valve systems connected to intrinsically safe I/O baseplate

# **FLUID POWER SOLUTIONS**<sup>®</sup>

**Find a location near you!**




## **Mi Fluid Power Solutions**

Looking for specialized solutions for fluid power operations? Talk to the experts at Mi Fluid Power Solutions for expertise related to hydraulic power units, gearbox, and cylinder repair.

To view locations, scan QR Code or go to: [qrco.de/bd4Ofp](https://qrco.de/bd4Ofp)



© 2022 Motion

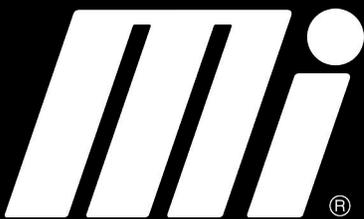

**MORE CHOICES. MORE INVENTORY. MORE EXPERTISE.**