

ENGINEERING
TOMORROW

Danfoss

Aeroquip® by Danfoss EC881 Dynamax® hose exceeds EN857 Type 2SC specifications

There are a **million reasons**
to choose Aeroquip EC881
Dynamax hose.

Well, actually **one million + eight.**

Aeroquip by Danfoss

EC881-6

9.5 MM (0.38 IN)
DN10


1 MILLION
Qualified
Impulse Cycles



Reduced
Cost



Reduced
Weight



Better
Flexibility



Higher Pressure
Rating



26%
Higher Operating
Temp



More Impulse
Life



Higher Abrasion
Resistance



And Over 50%
More Flexible

Aeroquip by Danfoss EC881 Dynamax hose

Danfoss is proud to introduce the Aeroquip® EC881 Dynamax® hose, the new high performing, two wire EN857 2SC braided hose, qualified to 1 Million impulse cycles. The EC881 Dynamax hose outperforms the typical EN857 2SC 200,000 impulse cycle requirement by 5X, in addition to providing a range of other benefits such as: lighter weight, higher abrasion resistance, and higher pressure & temperature ratings. Aeroquip by Danfoss EC881 Dynamax hose provides many advantages in applications such as agriculture, oil & gas, and mining including reduced cost, decreased downtime, and better fuel efficiency. See below for more information regarding applications, features and benefits:

Applications

- Compact construction equipment
- Agricultural equipment
- Mining
- Oil & Gas
- Forestry/Logging equipment
- Waste/Refuse trucks
- Aerial lifts

Features

- 1 million impulse cycle performance
- Higher pressure ratings than standard two wire braided hose
- Low compression set due to new Dura-Pulse™ inner tube
- Aeroquip by Danfoss EC881 hose provides superior flexibility (1/3 SAE 100R2 bend radius at 100°C)
- Dura-Tuff™ cover

Benefits:

- Extended product life expectancy over standard EN857 Type 2SC hoses
- Allows for use in a broader range of hydraulic systems where four spiral hoses may have been required in the past
- Better sealing and leak free performance
- Improved flexibility for easier installation in tight spaces
- Provides additional abrasion resistance which is a leading cause of hydraulic hose failures

Hose I.D.				Hose O.D. (nominal)		Maximum Operating Pressure		Min. Burst Pressure		Min. Bend Radius		Weight.	
Part #	DN	mm	in	mm	in	bar	psi	bar	psi	mm	in	kg/m	lbs/ft
EC881-4	6	6.4	0.25	13.6	0.54	450	6525	1800	26100	33	1.30	0.32	0.22
EC881-6	10	9.5	0.38	17.3	0.68	400	5800	1600	23200	42	1.65	0.42	0.28
EC881-8	12	12.7	0.50	20.9	0.82	360	5220	1440	20880	60	2.36	0.58	0.39
EC881-10	16	15.9	0.63	24.0	0.94	350	5075	1400	20300	68	2.68	0.75	0.50
EC881-12	19	19.0	0.75	27.9	1.10	330	4785	1320	19140	80	3.15	1.03	0.69
EC881-16	25	25.4	1.00	34.6	1.36	280	4060	1120	16240	150	5.91	1.47	0.99
EC881-20	31	31.8	1.25	43.4	1.71	172	2500	688	9980	210	8.27	1.75	1.18
EC881-24	38	38.1	1.50	51.8	2.04	138	2000	552	8000	250	9.84	1.91	1.28

Construction

Inner tube:
Dura-Pulse patented inner tube

Reinforcement:
2 Wire Braid

Cover:
Dura-Tuff synthetic rubber cover

Temperature Range

-46°C to +126°C*
(-50°F to +260°F)

*at 1/2 SAE 100R2 bend radius

Agency Listings

- Exceeds EN 857 2SC
- MSHA
- ABS
- DNV-GL

Approved Fittings

1A (TTC) series



reduced cost



reduced weight



better flexibility



higher pressure rating



higher operating temp



more impulse life



higher abrasion resistance



1/3 BEND
and over 50% more flexible



1 MILLION
qualified cycles

Danfoss can accept no responsibility for possible errors in catalogs, brochures, and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



Find a location near you!




Mi Fluid Power Solutions

Looking for specialized solutions for fluid power operations? Talk to the experts at Mi Fluid Power Solutions for expertise related to hydraulic power units, gearbox, and cylinder repair.

To view locations, scan QR Code or go to: qrco.de/bd4Ofp



© 2022 Motion

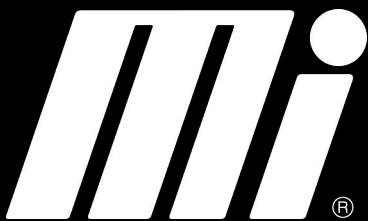

MORE CHOICES. MORE INVENTORY. MORE EXPERTISE.